

4950 MHz to 7125 MHz, 2-foot collapsible
Parabolic Antenna, 2x2 MIMO, 30 dBi, N-Type (F),
2 Pack

KP-6PDCN-2-NF



Features

- 2-Foot collapsible parabolic antenna
- 4950 to 7125 MHz, 30 dBi
- VSWR < 2.5:1
- All aluminum dish
- Dual slant (V/H or ±45°)
- 50 W max input power per port
- 2 x N-Type female connectors
- DC ground

Applications

- Long distance backhaul
- Point to point data links (PtP)
- Point to multi-point data links (PtMP)
- Wi-Fi 5, Wi-Fi 6, Wi-Fi 6E and Wi-Fi 7
- Unlicensed 5GHz and 6GHz bands
- 5G bands - n46, n47, n96, n102, n104
- 2x2 MIMO capability
- High speed internet access

Description

The KP Performance KP-6PDCN-2-NF collapsible parabolic antenna is for point to point communications that uses a parabolic reflector to direct the waves to the receiver in its focal point. It has a frequency range of 4950 to 7125 MHz, providing stability over a wide bandwidth to support gigabit transmissions and has operating temperature ranging from -40°C to 70°C (-32°F to 158°F). This antenna has a 30 dBi high gain, which describes electrical power conversion capability.

The KP Performance KP-6PDCN-2-NF collapsible parabolic antenna has an N-Type Female connector capable of carrying microwave frequencies used to join coaxial cables. This point to point antenna has a 50 Ohms impedance and is highly directional, which means it receives greater power in a specific direction. This antenna features dual slant (V/H or ±45°) polarization, which makes them compatible with any single or dual polarized 2 x 2 MIMO radio and eliminates the risk of link strength degradation due to polarization mismatch.

The KP Performance white collapsible parabolic antenna is of 2 feet size and has less than 2.5 VSWR (Voltage Standing Wave Ratio) that results in the best power transfer and reduced losses. It has 50 W maximum power per port within which it has the ability to perform without damage. This antenna has dc ground lightning protection to protect the system from damage due to lightning strikes.

This KP Performance KP-6PDCN-2-NF collapsible parabolic antenna, 4950 to 7125 MHz, 30 dBi is in stock and ready to ship same-day. This high-performance 30 dBi wifi 6e antenna is ideal for 4.9/5.1/5.3/5.4/5.8/6 GHz ISM and UNII band, Wi-Fi 6e and Wi-Fi 7, and long distance backhaul and point to point data link applications. Based on your specifications, our expert technical support and highly trained sales team can find the ideal 4950 to 7125 MHz, 30 dBi collapsible parabolic antenna.

Configuration

Design	Parabolic
Application Band	MIMO
Band Type	Single
Polarization	H/V or 45 Deg. Slant
Connector Type	N-Type Female
Interface 2	N-Type Female
Number of Ports	2
Lightning Protection	DC Grounded

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	4,950		7,125	MHz


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4950 MHz to 7125 MHz, 2-foot collapsible Parabolic Antenna, 2x2 MIMO, 30 dBi, N-type \(F\), 2 Pack KP-6PDCN-2-NF](#)

4950 MHz to 7125 MHz, 2-foot collapsible
Parabolic Antenna, 2x2 MIMO, 30 dBi, N-Type(F),
2 Pack



KP-6PDCN-2-NF

Input VSWR		2:1	
Impedance	50		Ohms
Front to Back Ratio	30		dB
Horizontal (Azimuth) HPBW	5		Degrees
Vertical (Elevation) HPBW	5		Degrees
Input Power		50	Watts

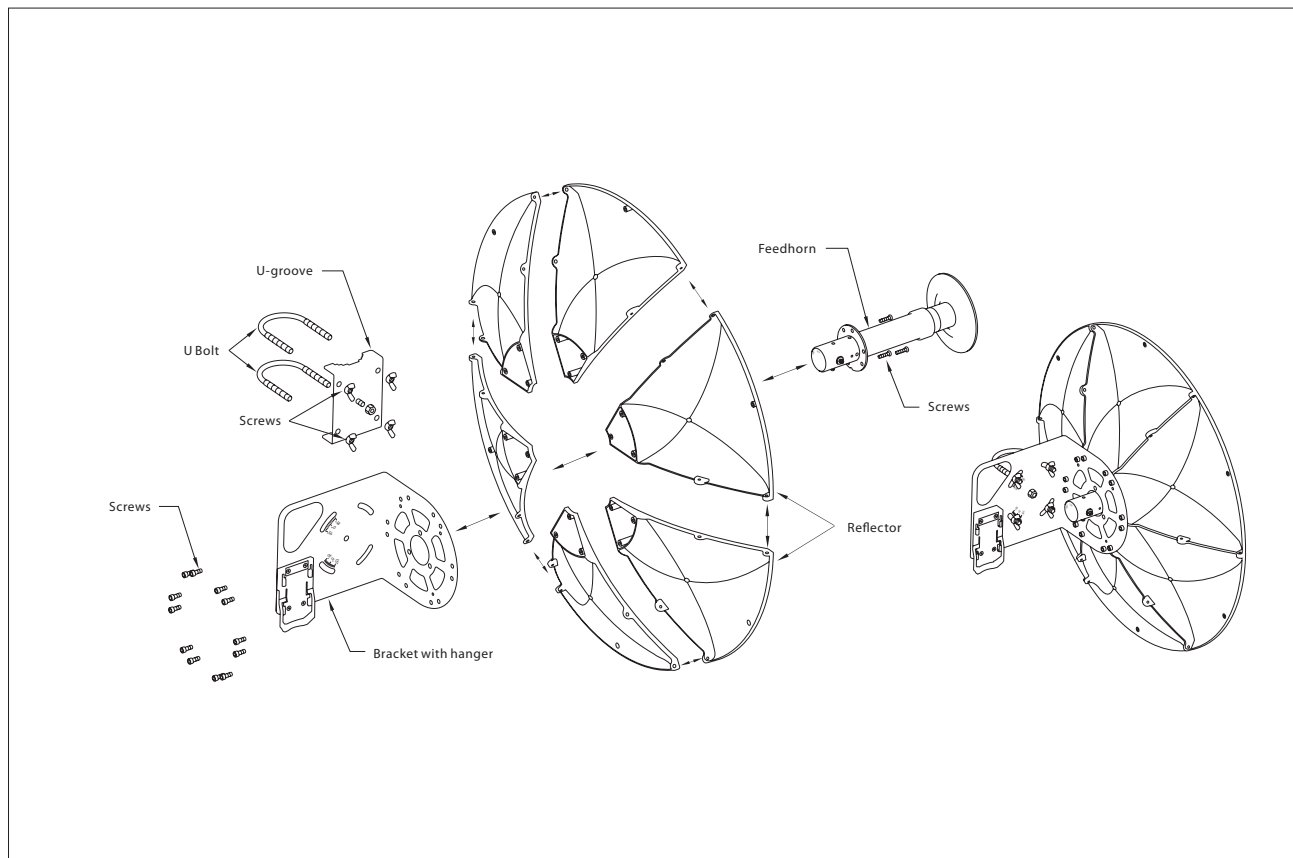

Specifications by Band

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4950 MHz to 7125 MHz, 2-foot collapsible Parabolic Antenna, 2x2 MIMO, 30 dBi, N-Type\(F\), 2 Pack KP-6PDCN-2-NF](#)

4950 MHz to 7125 MHz, 2-foot collapsible
Parabolic Antenna, 2x2 MIMO, 30 dBi, N-Type(F),
2 Pack



KP-6PDCN-2-NF

Description	Band 1	Band 2	Band 3	Band 4	Band 5	Units
Range	4.95 to 5.1	5.1 to 5.9	5.9 to 7.125			GHz
Gain	29	30	31			dBi
VSWR Max	2.5:1	2:1	2:1			

Mechanical Specifications

Radome Material	Aluminum
Size	
Length	23.6 in [599.44 mm]
Width	23.6 in [599.44 mm]
Height	8 in [203.2 mm]
Mounting Mast Diameter	1.1811 to 3.14961 in [30.00 to 80.00 mm]
Weight	26.95 lbs [12.22 kg]

Environmental Specifications

Temperature	
Operating Range	-40 to +70 deg C

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4950 MHz to 7125 MHz, 2-foot collapsible Parabolic Antenna, 2x2 MIMO, 30 dBi, RPSMA, 2 Pack KP-6PDCN-2-NF](#)

4950 MHz to 7125 MHz, 2-foot collapsible
Parabolic Antenna, 2x2 MIMO, 30 dBi, N-Type (F),
2 Pack

KP-6PDCN-2-NF



Appendix

Electrical Downtilt: Angle in the antenna's elevation pattern in which the maximum gain occurs.

Gain: Antenna's average gain.

Front to Back Ratio @ 180°±30°: Average difference between the antenna's maximum gain and the maximum gain in the antenna's back lobe over ±30° angles.

Cross-polarization Ratio (dB): Typical difference between the co-polarization and cross-polarization gain across the sector's 3 dB Beam Width.


Dedicated to serving the needs of the Wireless Internet Service Provider (WISP) market, KP Performance Antennas offers purpose built products that reliably perform in the field. KP Performance Antennas product line consists of Yagi, Grid, Omni, Dish and other style antennas that operate in the 900 MHz, 2.4 GHz, 3 GHz, and 5 GHz frequencies.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4950 MHz to 7125 MHz, 2-foot collapsible Parabolic Antenna, 2x2 MIMO, 30 dBi, N-Type \(F\), 2 Pack KP-6PDCN-2-NF](#)

URL: <https://www.kpperformance.com/4950-mhz-to-7125-mhz-2-foot-collapsible-parabolic-antenna-2x2-mimo-30-dbi-rpsma-kp-6pdcn-2-rsp-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. KP Performance reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. KP Performance does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and KP Performance does not assume liability arising out of the use of any part or document.

KP-6PDCN-2-NF CAD Drawing

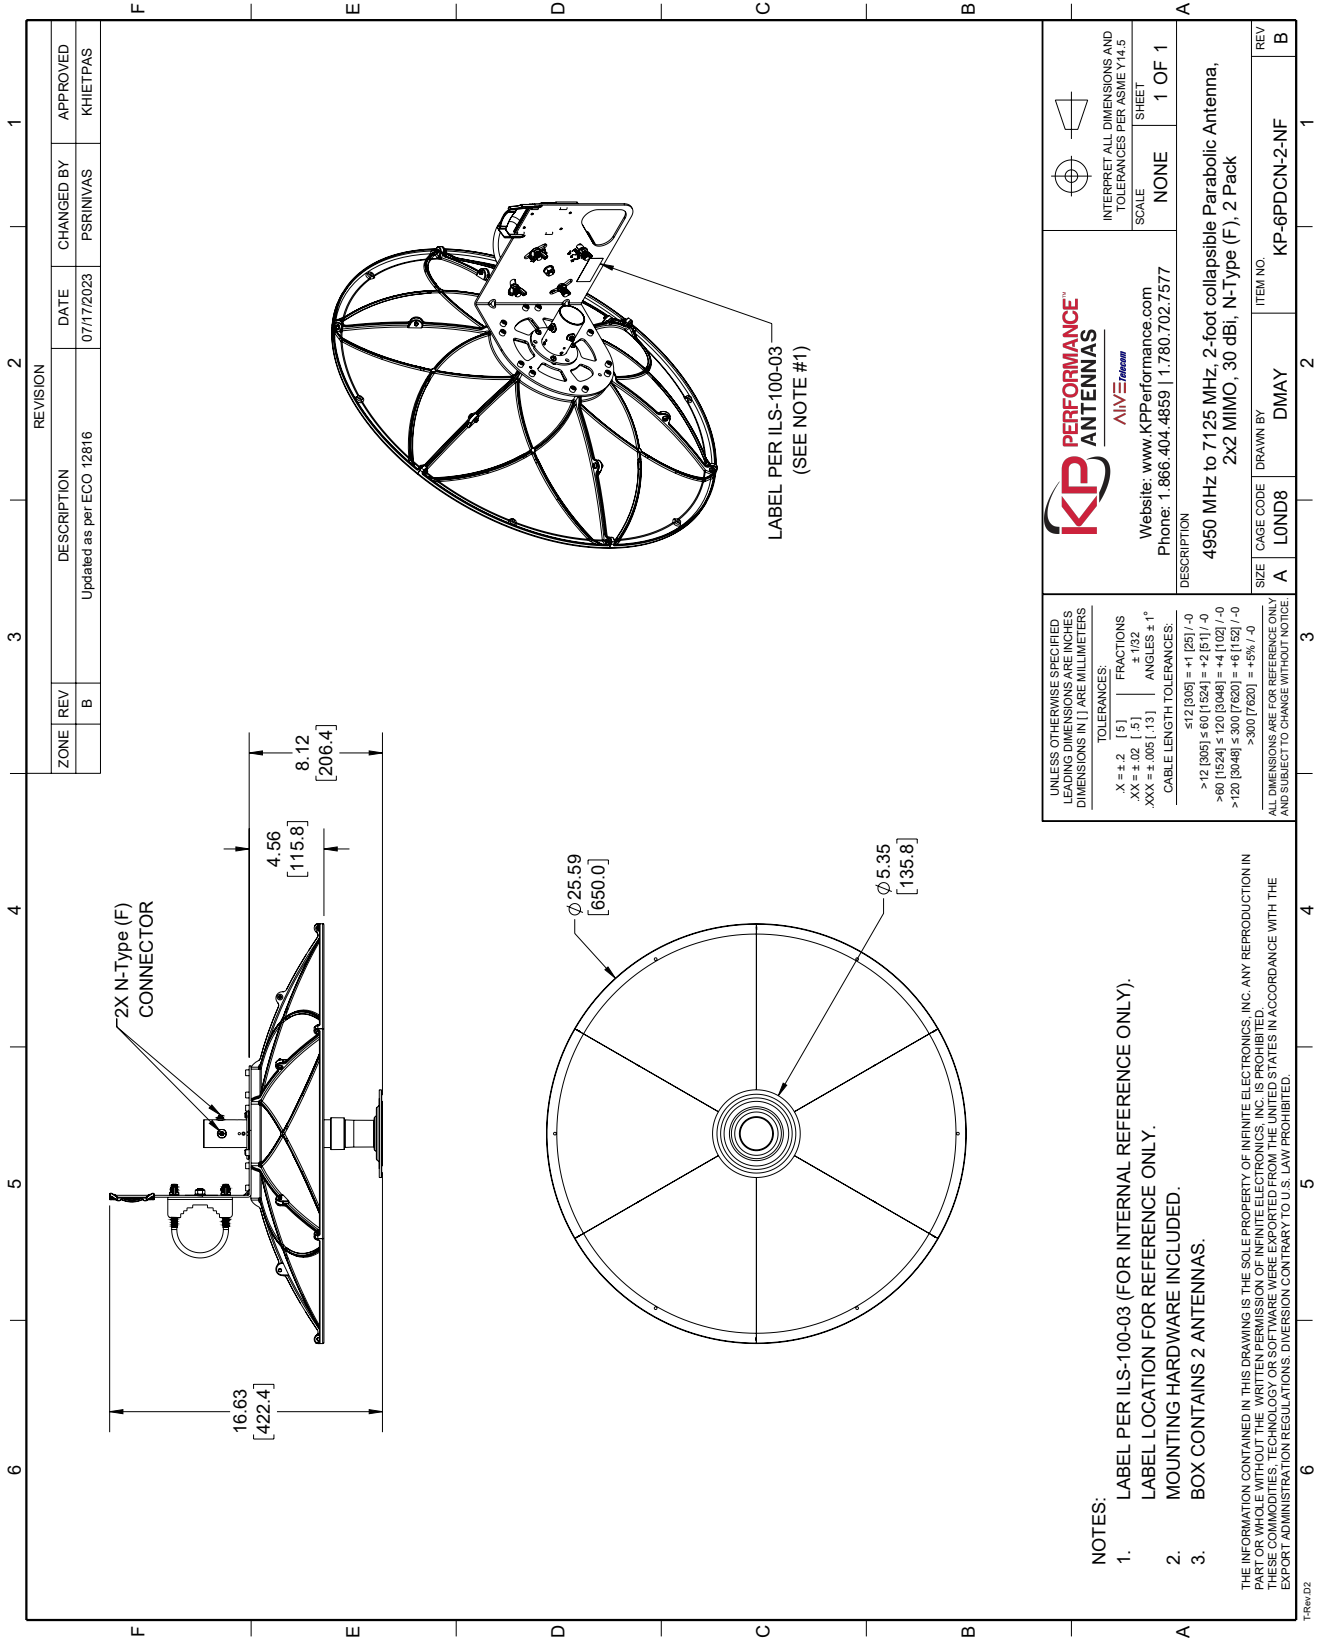

KP PERFORMANCE
 AN ANTENNA
 Website: www.kpperformance.com
 Phone: 1.866.404.4859 | 1.780.702.7577

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5
 SCALE: NONE
 SHEET: 1 OF 1

DESCRIPTION: 4950 MHz to 7125 MHz, 2-foot collapsible Parabolic Antenna, 2x2 MIMO, 30 dBi, N-Type (F), 2 Pack

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	LOND8	DMAY	KP-6PDCN-2-NF

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
 .X = ±.2 [5]
 .XX = ±.02 [5]
 .XXX = ±.005 [13]
 FRACTIONS ± 1/32
 ANGLES ± 1°
 CABLE LENGTH TOLERANCES:
 ≤ 12 (305) = ±1 (25) / -0
 > 12 (305) ≤ 60 (1524) = ±2 (51) / -0
 > 60 (1524) ≤ 120 (3048) = ±4 (102) / -0
 > 120 (3048) ≤ 300 (7620) = ±6 (152) / -0
 > 300 (7620) = ±5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.

NOTES:
 1. LABEL PER ILS-100-03 (FOR INTERNAL REFERENCE ONLY).
 LABEL LOCATION FOR REFERENCE ONLY.
 2. MOUNTING HARDWARE INCLUDED.
 3. BOX CONTAINS 2 ANTENNAS.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.