



Directional DAS Antenna PIM Rated

Electrical Specifications

Frequency Range	698-960 MHz 1710 -2700 MHz
Gain	6/9 dBi
VSWR (Return Loss)	<1.5:1
Passive IM 3 rd Order (2x20W)	-150 dBc
Power Input	50 W
Vertical Beamwidth	75°/55°
Horizontal Beamwidth	90°/75°
Input	N-Female


Mechanical Specifications

Length x Width	6.5" x 6.0"
Depth	2"
Weight	0.75 lbs
Shipping Weight	1.0 lb
Shipping Dimensions	L 7.0" W 10.0" H 3.0"
Projected Area	0.28 ft ²
Lateral Thrust @ 100mph	N/A
Wind Gust Rating	N/A




**Mount Hardware Included*

Azimuth Pattern

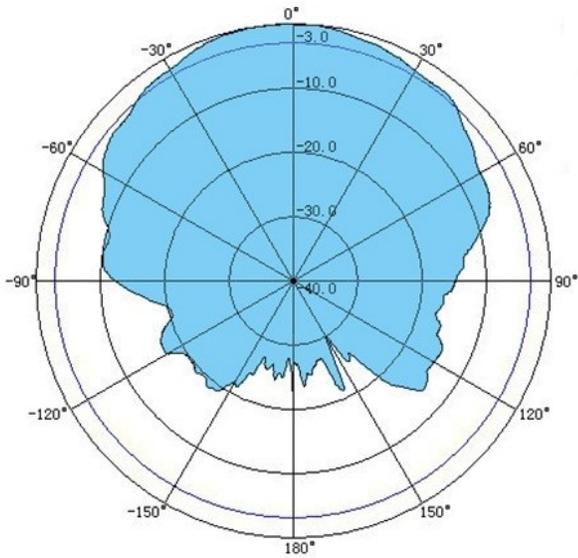


698-960 MHz

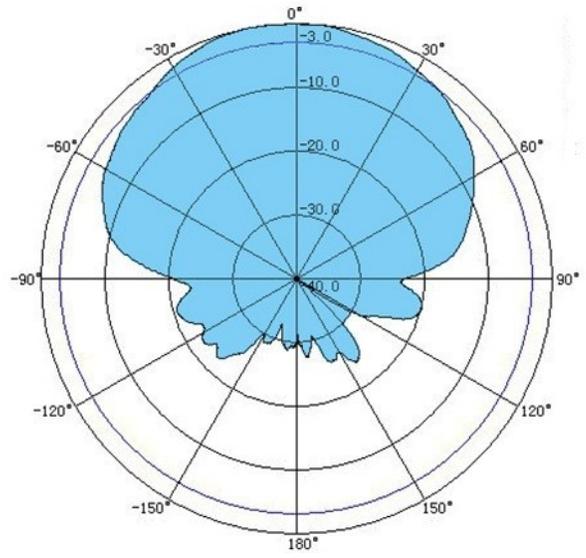


1710-2700 MHz

Elevation Pattern

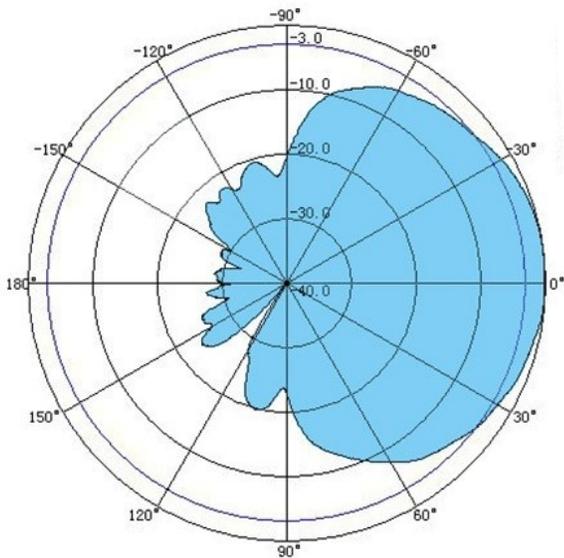

698-960 MHz

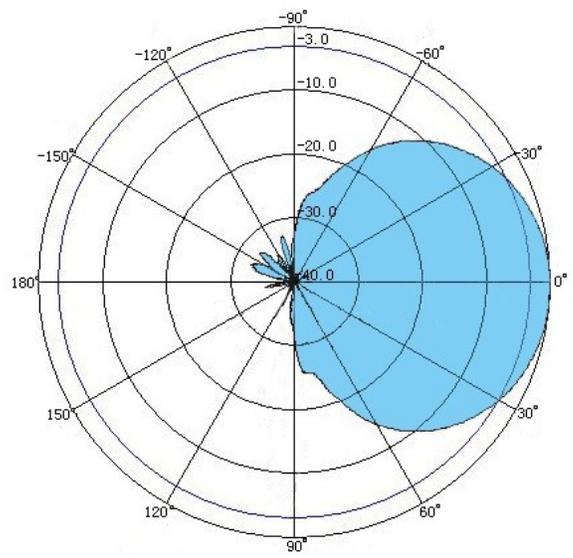

1710-2700 MHz