



DAS OMNI 700/800 PCS AWS

Electrical Specifications

| | |
|--|-------------------------------|
| Frequency Range | 698-960 MHz 1695 -2700 MHz |
| Gain | 2/5 dBi |
| VSWR (Return Loss) | ≤1.7/≤1.5 |
| Passive IM 3 rd Order (2x20W) | -150 dBc |
| Power Input | 50 W |
| Vertical Beamwidth | 80°/50° |
| Horizontal Beamwidth | Omnidirectional |
| Input | N-Female |


Mechanical Specifications

| | |
|-------------------------|-----------------------------|
| Length x Width | 7.25" x 7.25" |
| Depth | 3.35" |
| Weight | 0.5 lbs |
| Shipping Weight | 1.0 lb |
| Shipping Dimensions | L 7.5" W 7.5" H 5.25" |
| Projected Area | 1 ft ² |
| Lateral Thrust @ 100mph | N/A |
| Wind Gust Rating | N/A |



**Mount Hardware Included*

Azimuth Pattern

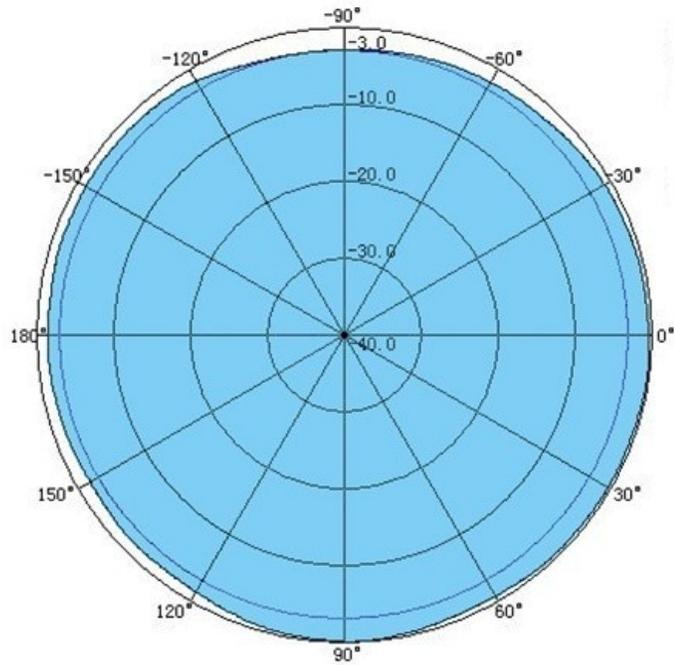

Elevation Pattern

