





Broad Band UHF Panel

Available Horizontal, Vertical, Elliptical 35% or Circular Polarization

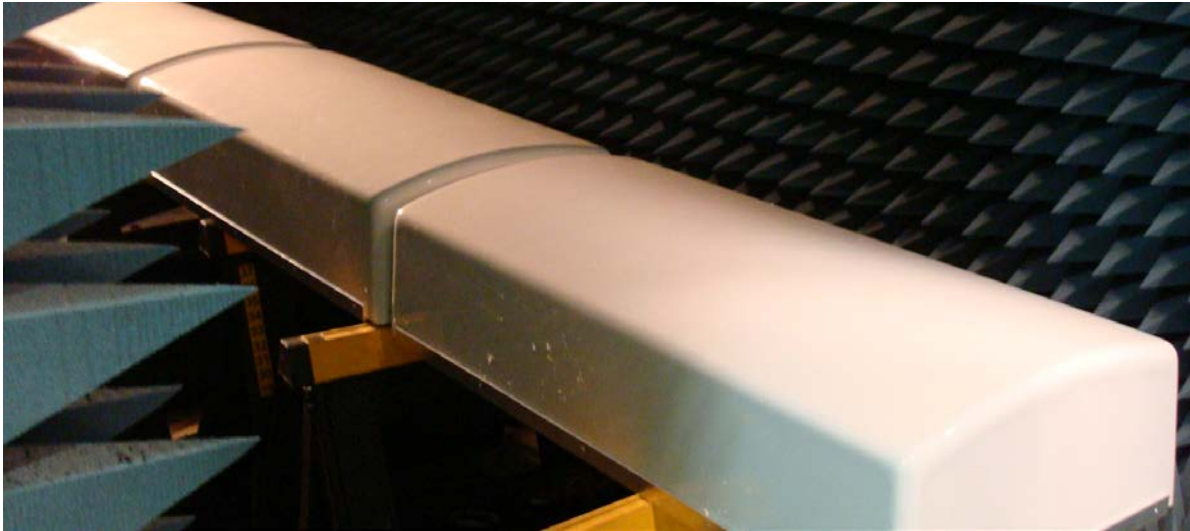

Electrical Specifications	
Frequency Range	470 – 806 MHz
Gain Single Panel	15.8 (12dBd)
Impedance	50 Ω
VSWR	< 1.1
Polarization	H, V, E or C
Horizontal Beamwidth	65°
Input 7/16 DIN (f)	1000 W
7/8" EIA	1500 W

Mechanical Specifications	
Length x Width x Height(in)	38.5 x 17.5 x 8.7
Weight	27 lbs
CaAc	4.7 ft ²
Construction	Brass & SSteel
Max. Wind Velocity	135 mph

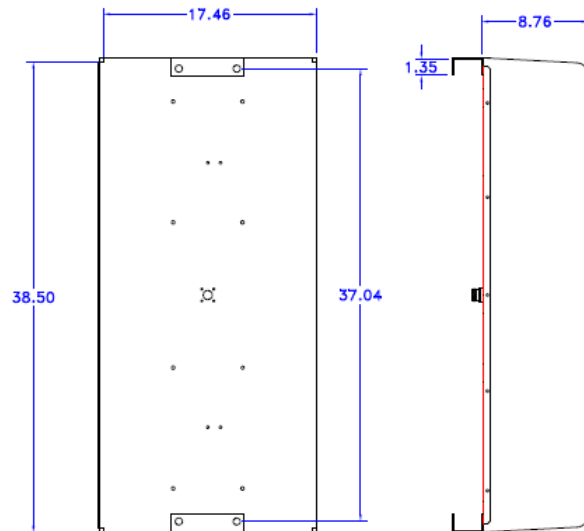

Nominal Patterns

