

## UHF Directional Exposed Dipole Antenna

- Broadband Performance covers entire band
- 100% Welded Construction
  - Increased Durability
  - Decreased Installation time
- Internally routed cable harness
  - Protects harness from elements and animals
  - Prevents damage during installation
- Highest gain antenna option in the UHF Band

### Electrical Specifications

Frequency Range	400-520 MHz
Gain	11 dBd
VSWR (Return Loss)	<1.5:1 (14 dB)
Passive IM 3 <sup>rd</sup> Order (2x20W)	-150 dBc
Peak Instantaneous Power (PIP)	25 kW
Power Input	500 W
Vertical Beamwidth	8°
Horizontal Beamwidth	180°
Input	7-16 DIN-Female D7 4.3-10 DIN-Female D4

### Mechanical Specifications


Configuration	8 Dipoles (8 Bays) single-sided Single section support
Length	197"
Weight	38 lbs
Shipping Weight	64 lbs
Shipping Dimensions	L 203" W 13" H 3.75"
Mounting Area	30.0" x 1.9" diam. Aluminum
Suggested Clamps (not included)	PLMTKIT-1

### Environmental Specifications

Temperature Range	-40° to 140°F (-40° to 60°C)
Wind Velocity (Max)	150 MPH
Wind Velocity -1/2" Ice (Max)	125 MPH
Projected Area	3.5 ft <sup>2</sup> (no ice) 3.8 ft <sup>2</sup> (with ice)
Lateral Thrust @ 100mph	140 lbs



**Standard Elevation Pattern**

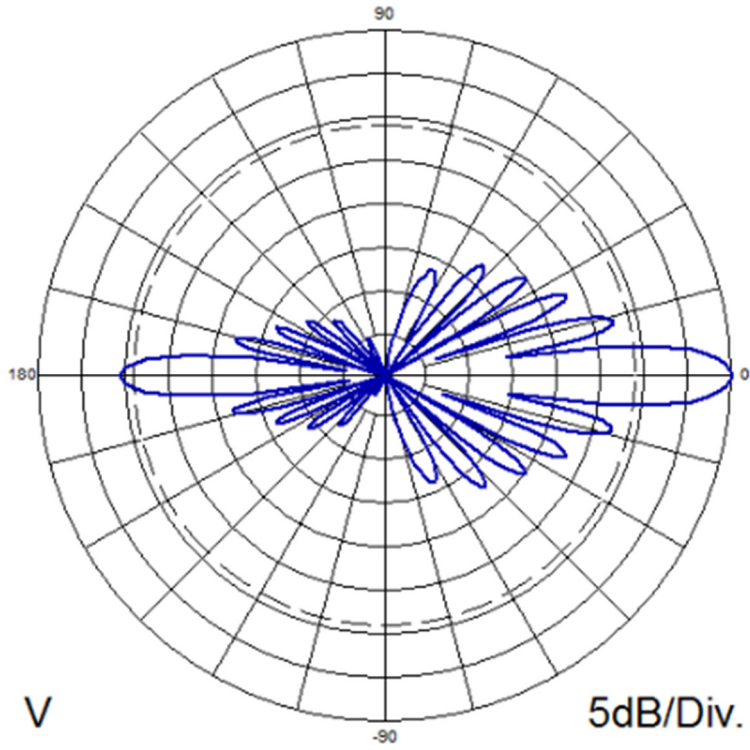

**Azimuth**

