


## VHF Back Panel Directional Exposed Dipole Antenna

- Broadband Performance covers entire band
- 100% Welded Construction
  - Increased Durability
  - Decreased Installation time
- Internally routed cable harness
  - Protects harness from elements and animals
  - Prevents damage during installation


Electrical Specifications	
Frequency Range	136-174 MHz
Gain	5.6 dBd
VSWR (Return Loss)	<1.5:1 (14 dB)
Passive IM 3 <sup>rd</sup> Order (2x20W)	-150 dBc
Peak Instantaneous Power (PIP)	25 kW
Power Input	500 W
Vertical Beamwidth	60°
Horizontal Beamwidth	60°
Input	7-16 DIN-Female D7 4.3-10 DIN-Female D4
F/B Ratio	-17.5 dB

Mechanical Specifications	
Configuration	1 Bay
Length	60"
Weight	41 lbs
Shipping Weight	46 lbs
Shipping Dimensions	L 68" W 46" H 8"
Mounting Area	24"
Suggested Clamps (not included)	PLMTKIT

Environmental Specifications	
Temperature Range	-40° to 140°F (-40° to 60°C)
Wind Velocity (Max)	150 MPH
Wind Velocity -1/2" Ice (Max)	115 MPH
Projected Area	2.74 ft <sup>2</sup> (no ice) 4.90 ft <sup>2</sup> (with ice)
Lateral Thrust @ 100mph	109.6 lbs

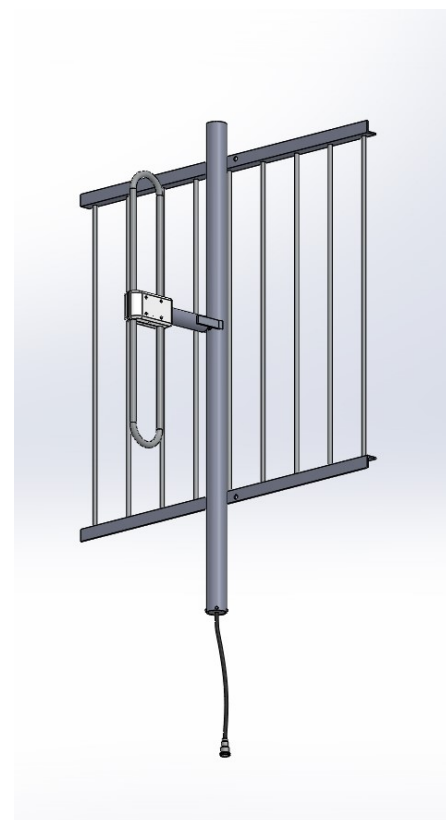

### Standard Elevation Pattern

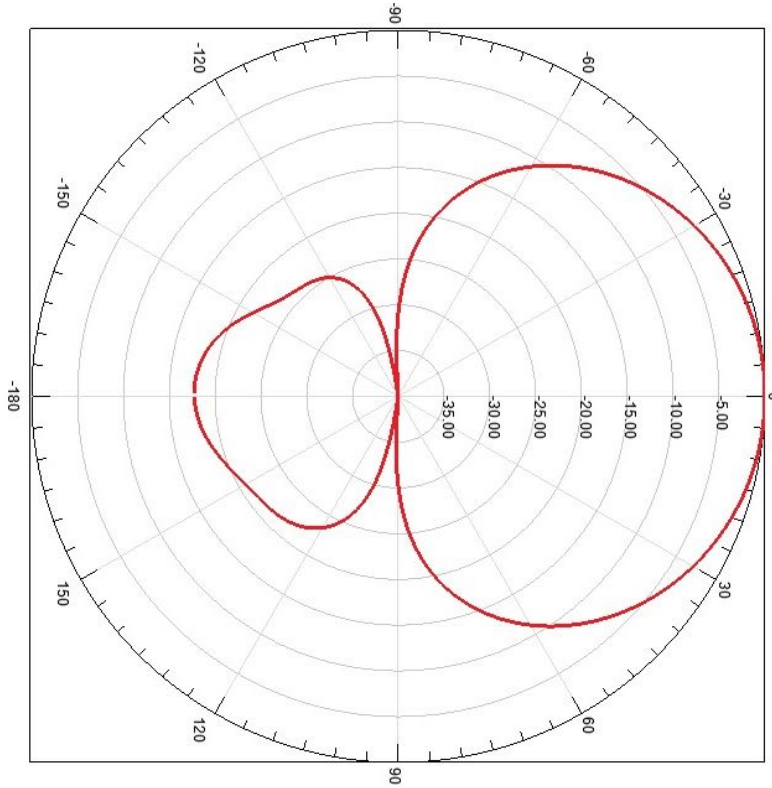

### Azimuth

