

UHF Back Panel Directional Exposed Dipole Antenna

- Broadband Performance covers entire band
- 100% Welded Construction
 - Increased Durability
 - Decreased Installation time
- Internally routed cable harness
 - Protects harness from elements and animals
 - Prevents damage during installation


Electrical Specifications	
Frequency Range Dual Band	406-512 MHz
Gain	7 dBd
Nominal Impedance	50 Ω
VSWR (Return Loss)	<1.5:1 (14 dB)
Passive IM 3 rd Order (2x20W)	-150 dBc
Peak Instantaneous Power (PIP)	25 kW
Power Input	500 W
Vertical Beamwidth	71°
Horizontal Beamwidth	70°
Front/Back Ratio	22 dB
Input	7-16 DIN-Female D7 4.3-10 DIN-Female D4 20" pigtail

Mechanical Specifications													
Configuration	Exposed Dipole with Back Panel												
Length/Width	40" x 33"												
Weight	13 lbs												
Shipping Weight	Screen: 20 lbs Dipole Assembly: 30 lbs												
Shipping Dimensions	<table border="1"> <thead> <tr> <th></th> <th>Screen</th> <th>Dipole Assembly</th> </tr> </thead> <tbody> <tr> <td>L</td> <td>15.00"</td> <td>44.00"</td> </tr> <tr> <td>W</td> <td>35.00"</td> <td>13.00"</td> </tr> <tr> <td>H</td> <td>5.00"</td> <td>3.75"</td> </tr> </tbody> </table>		Screen	Dipole Assembly	L	15.00"	44.00"	W	35.00"	13.00"	H	5.00"	3.75"
	Screen	Dipole Assembly											
L	15.00"	44.00"											
W	35.00"	13.00"											
H	5.00"	3.75"											
Mounting Area	24"												
Suggested Clamps (not included)	PLMTKIT												

Environmental Specifications	
Temperature Range	-40° to 140°F (-40° to 60°C)
Wind Velocity (Max)	150 MPH
Projected Area	2.9 ft ² (no ice) 5.0 ft ² (with ice)
Lateral Thrust @ 100mph	72 lbs



Elevation Pattern

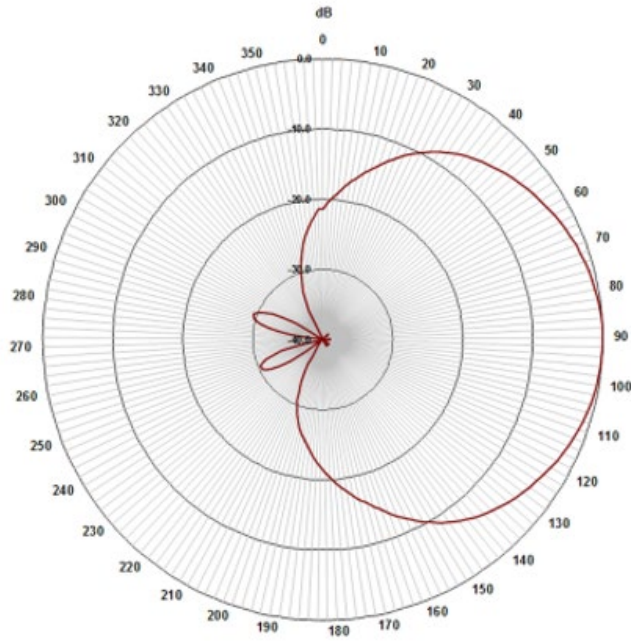

Azimuth Pattern

